



## ENTERPRISE IP PHONE CHIP

### FEATURES

- The BCM1113 is the most highly-integrated silicon solution targeted for midrange Voice-over IP enterprise phones.
- The BCM1113 integrates:
  - 100-MHz MIPS32™ CPU (96 DMIPS) with 8K I-cache and 4K D-cache.
  - Superscalar 108-MHz ZSP DSP with dual-MAC (216 MIPS), 48K instruction, and 32K data RAM.
  - Three-port 10/100BASE-T Ethernet switch with 64K buffer memory.
  - Two 10/100BASE-T Ethernet PHYs with in-line power over Ethernet support.
  - Three wideband audio ADCs and DACs.
  - 9 x 9 keyscan controller.
  - Ethernet status LED driver.
  - TDM IOM-2<sup>®</sup> port.
  - Two UARTs.
  - Two high-speed serial ports.
  - General purpose I/O.
  - Interrupt control unit.
  - DMA support unit.
  - SDRAM interface.
  - External bus interface.
  - IEEE 1149.1 (JTAG).
- 0.18μ process technology, 1.8V/3.3V.
- 1.1W peak, 0.3W – 0.8W standby modes.
- 256-pin PBGA package enables 4-layer PCB designs.
- Pin and software compatible with the BCM1101, BCM1113R, BCM1115, and BCM1115R ICs.


### SUMMARY OF BENEFITS

- **10/100BASE-T Ethernet Switch with 802.1p/Q support.**
  - 802.1p priority queuing ensures QoS for voice packets and minimizes latency.
  - Supports modification of 802.1p priority tags on packets to enforce priority tagging rules.
  - 802.1Q VLAN support allows for segmenting physical networks into multiple logical networks.
  - MIPS32 CPU not burdened by data packet processing, leaving more cycles for application program.
  - Enables wire-speed non-blocking operation.
  - Blocks unnecessary traffic by learning local MAC addresses.
  - Segments network, preventing any restriction on number of hops.
- **100-MHz MIPS32 CPU and 108-MHz DSP Support.**
  - VxWorks<sup>®</sup> Operating System.
  - SIP, H.323, H.248/Megaco, and MGCP.
  - G.711, G.726, G.729A/AB/E, G.723.1/A, G.728, G.722.1 and BroadVoice<sup>®</sup>.
  - Full-duplex speakerphone operation.
  - Handset echo suppression.
  - Two- and three-channel conferencing using complex vocoders.
  - Enhanced packet loss concealment.
  - Paging (via a G.711 channel).
  - User application software.
- **10/100BASE-T Ethernet MACs and PHYs.**
  - Integrates support for Cisco<sup>®</sup> in-line power specification.
  - Compliant with 802.3af power-over-Ethernet standard.
  - Provides auto-MDI/MDIX, enabling the use of straight or crossover cables in either port.
- **Wideband audio CODECs.**
  - Enables support of emerging wideband vocoding standards.

### HARDWARE PLATFORMS

- **BCM91101 reference platform.**
  - Ethernet IP phone reference platform for midrange IP phone designs.

# OVERVIEW

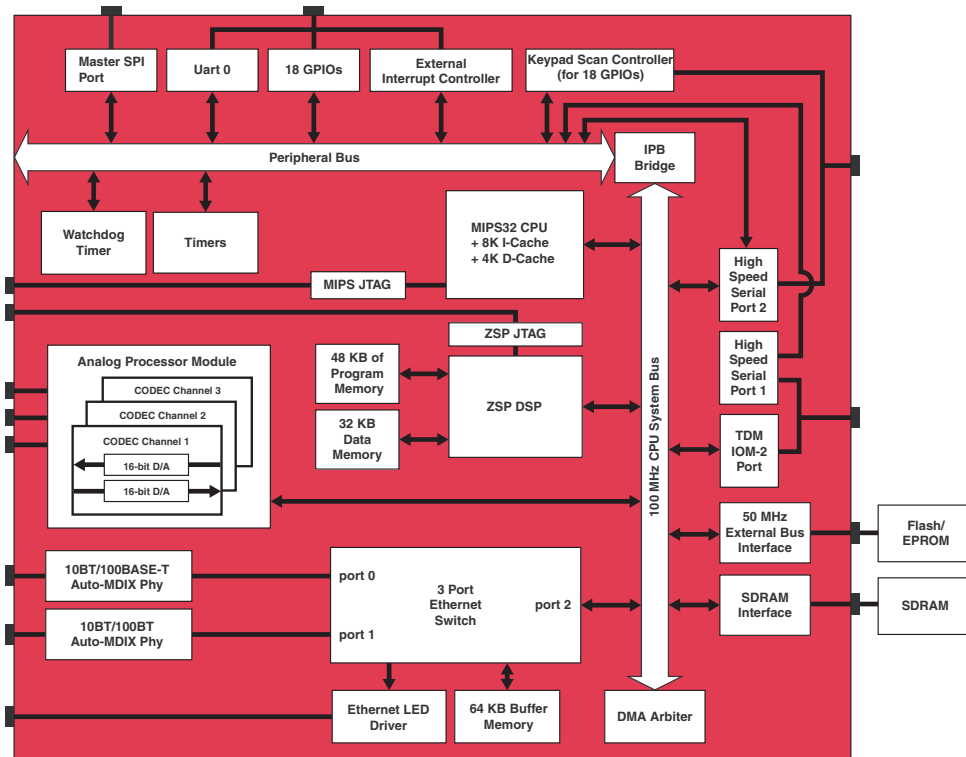

## BCM1113 VoIP Ethernet CPE Engine

The Broadcom BCM1113 is a highly integrated IC targeted for the mid-range Enterprise Voice-over IP market.

Key modules integrated in the BCM1113 include:

- MIPS32 100-MHz processor with 8K 2-way set associative I-cache and a 4K 2-way associative D-cache. This MCU supports the VoIP protocol stacks, jitter buffer management, and application program. Programming is done in C, on top of Broadcom's object-oriented signal processing API.
- ZSP 108-MHz DSP with 48-KB instruction and 32-KB data RAM. The DSP supports a wide range of vocoders, acoustic echo cancellation for full-duplex speakerphone, fax modems, and a variety of telephony algorithms (e.g., DTMF and Call Progress Tones).
- Analog codecs. Three ADCs and DACs are integrated, eliminating the need for an analog switch to allow the sharing of a codec between multiple interfaces.

- 10/100BASE-T Ethernet switch, media access controllers, and transceivers. The three-port Ethernet switch integrates three full-duplex capable Media Access Controllers (MACs), a serial management port, an address resolution engine, a non-blocking switch controller, 64K of internal switch memory, 802.1p prioritization for voice packets, 802.1Q VLAN support for segmenting physical networks into multiple logical networks, and a set of Management Information Base (MIB) statistics registers. The two transceivers perform all of the functions for 100BASE-T Ethernet in full- or half-duplex mode over Category (CAT) 5 twisted-pair cable and 10BASE-T Ethernet in full- or half-duplex mode over CAT 3, 4, or 5 twisted-pair cable. They support auto-MDI/MDIX detection to allow the use of any cable type in either port. The transceivers also integrate support for in-line powering over Ethernet.

The BCM1113 integrates all the key silicon components of an Ethernet IP phone into a single device and is pin and software compatible with the BCM1101. The BCM1113 is suited for SOHO Voice-over IP phone products that require mid-range application feature sets (e.g., basic user applications operating on 2-line character displays) while still requiring the same voice quality and reliability of higher-end IP phone products.

Broadcom®, the pulse logo, Connecting everything®, the Connecting everything logo, and BroadVoice® are among the trademarks of Broadcom Corporation and/or its affiliates in the United States, certain other countries and/or the EU. Any other trademarks or trade names mentioned are the property of their respective owners.

Connecting  
everything®



**BROADCOM CORPORATION**  
16215 Alton Parkway, P.O. Box 57013  
Irvine, California 92619-7013

© 2006 by BROADCOM CORPORATION. All rights reserved.

1113-PB03-R 3/07/06

Phone: 949-450-8700  
Fax: 949-450-8710  
E-mail: info@broadcom.com  
Web: www.broadcom.com